

## Full-Color Dome

Network Camera

MODEL: VIGI C230(2.8/4mm)



Human & Vehicle  
Classification



Smart Detection



Built-In Microphone



IK10 Vandal Proof



IP67 Waterproof

## // Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



## // Smart Detection



Intrusion  
Detection



Line-Crossing  
Detection



Object Removal  
Detection



Object Abandoned  
Detection



Region Entering  
Detection



Region Exiting  
Detection



Motion  
Detection



Camera  
Tampering

## // SmartVid



### Smart IR

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



### Wide Dynamic Range

Adjusts for lighting contrast to minimize shadowing effects and renders images true to life.




### 3D DNR

Removes abnormal pixelation to provide clearer video and eliminate distortion.

## // VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

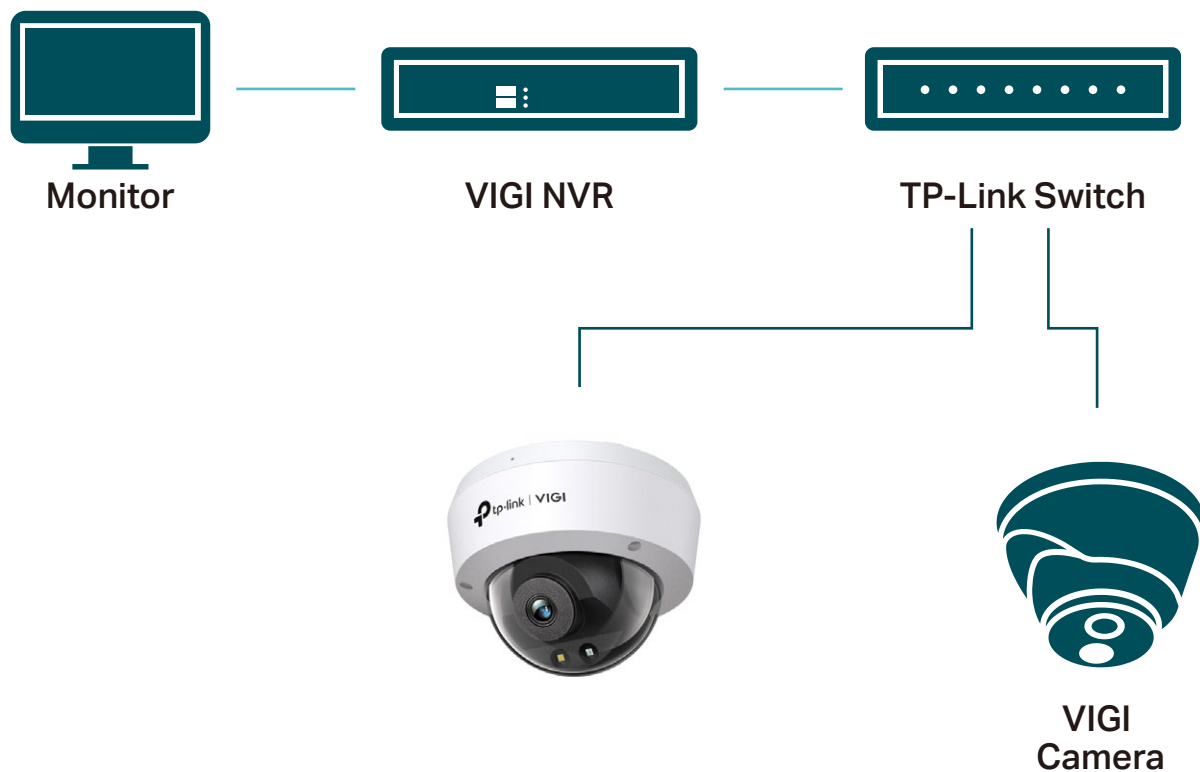

## // Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.



## // Specifications

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Shutter Speed	1/3 to 1/10000 s
Slow Shutter	Yes
Min. Illumination	Color: 0.005 Lux; 0 Lux with IR/White Light
Day & Night	IR Cut Filter
Day/Night Switch	Unified/ Scheduled/ Auto
Lens	
Type	Fixed Focal Lens
Focal length	2.8/4 mm
Aperture	F1.6
FOV	<ul style="list-style-type: none"><li>• 2.8 mm: Horizontal FOV: 107.5°, Vertical FOV: 57.2°, Diagonal FOV: 128.7°</li><li>• 4 mm: Horizontal FOV: 84.4°, Vertical FOV: 44.3°, Diagonal FOV: 100.6°</li></ul>
Lens Mount	M12
DORI Distance	<ul style="list-style-type: none"><li>• 2.8 mm: Detect: 52 m (170 ft) Observe: 22 m (71 ft) Recognize: 10 m (34 ft) Identify: 5 m (17 ft)</li><li>• 4 mm: Detect: 70 m (230 ft) Observe: 29 m (96 ft) Recognize: 14 m (46 ft) Identify: 7 m (23 ft)</li></ul>
Angle Adjustment (manual)	
Range	<ul style="list-style-type: none"><li>• Pan: 0° to 355°</li><li>• Tilt: 0° to 75°</li></ul>

Illuminator	
IR LED	<ul style="list-style-type: none"> <li>• Quantity: 1</li> <li>• Range: 30m</li> <li>• Wavelength: 850nm</li> </ul>
White LED	<ul style="list-style-type: none"> <li>• Quantity: 1</li> <li>• Range: 30m</li> </ul>
Illuminator On/Off Control	Auto/Scheduled/Always on/Always off
Video	
Max. Resolution	2304 × 1296
Main Stream	<ul style="list-style-type: none"> <li>• Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps</li> <li>• Resolution: 2304x1296, 2048x1280, 1920x1080, 1280x720</li> </ul> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</p>
Sub-Stream	<ul style="list-style-type: none"> <li>• Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps</li> <li>• Resolution: 704x576, 640x480, 352x288, 320x240</li> </ul> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</p>
Bit Rate Control	CBR, VBR
Video Compression	<ul style="list-style-type: none"> <li>• Main Stream: H.265+/H.265/H.264+/H.264</li> <li>• Sub-Stream: H.265/H.264</li> </ul>
H.264 Type	High Profile
H.264+	Main Stream Supported
H.265 Type	Main Profile
H.265+	Main Stream Supported
Video Bit Rate	<ul style="list-style-type: none"> <li>• Main Stream: 256 Kbps to 4 Mbps</li> <li>• Sub-Stream: 64 Kbps to 512 Kbps</li> </ul>

Image	
Image Settings	<ul style="list-style-type: none"> <li>• Mirror</li> <li>• Brightness</li> <li>• Contrast</li> <li>• Saturation</li> <li>• Sharpness</li> <li>• Exposure</li> <li>• WDR</li> <li>• White Balance</li> <li>• Prevent Overexposure to Infrared Light</li> <li>• HLC Adjustable by Client Software</li> <li>• Rotation(90°/270°)</li> </ul>
Image Enhancement	BLC/3D DNR/HLC/SmartIR
Wide Dynamic Range	DWDR
SNR	≥ 52 dB
Image Parameters Switch	Yes
Privacy Mask	Up to 4 Masks
ROI	1 Region
OSD Setting	Yes
Audio	
Audio Communication	N/A
Audio Input	Yes
Audio Output	N/A
Audio Compression	Yes
Audio Sampling Rate	8KHz
Environment Noise Filtering	Yes
Audio Bit Rate	64 Kbps(G.711 alaw)

Network	
Protocols	<ul style="list-style-type: none"> <li>• TCP/IP</li> <li>• UDP</li> <li>• ICMP</li> <li>• HTTP</li> <li>• HTTPS</li> <li>• DHCP, DNS, RTSP</li> <li>• NTP</li> <li>• UPnP</li> <li>• SSL/TLS</li> <li>• FTP/SFTP</li> <li>• RTP</li> <li>• IPv4</li> <li>• IPv6</li> <li>• ARP</li> </ul>
ONVIF	Yes
API	Open Network Video Interface (Profile S)
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, Web UI
Web Browser	<ul style="list-style-type: none"> <li>• Google Chrome® 57 and above</li> <li>• Firefox® 52 and above</li> <li>• Safari® 11 and above</li> <li>• Microsoft® Edge 91 and above</li> </ul>
Cloud	Yes
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication

Alarm and Event Management	
Smart Event	<ul style="list-style-type: none"> <li>• Human &amp; Vehicle Classification</li> <li>• Intrusion Detection</li> <li>• Line-Crossing Detection</li> <li>• Region Entering Detection</li> <li>• Region Exiting Detection</li> <li>• Object Abandoned/Removal Detection</li> <li>• Abnormal Sound Detection</li> <li>• People Detection</li> <li>• Vehicle Detection</li> </ul>
Basic Event	<ul style="list-style-type: none"> <li>• Motion Detection</li> <li>• Video Tampering Detection</li> <li>• Exception ( Illegal Login)</li> </ul>
Alarm Linkage	<ul style="list-style-type: none"> <li>• White Light Flashing</li> <li>• Message Push</li> </ul>
Linkage Method	N/A
Output Notification	Message Push
Interface	
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE
Alarm	N/A
Reset Button	N/A
Power	DC Power Port
On-board Storage	N/A
Built-in Microphone	Yes; Records Anything Going on within a 15-ft Radius of the Camera
Built-in Speaker	N/A
Audio	N/A
General	
Operating Temperature	-30–60 °C
Storage Temperature	-40–60 °C
Operating Humidity	95% or Less (Non-Condensing)
Storage Humidity	95% or Less (Non-Condensing)



Package Contents	<ul style="list-style-type: none"><li>• VIGI Network Camera</li><li>• Quick Start Guide</li><li>• Waterproof Cable Attachments</li><li>• Mounting Accessories</li></ul>
Power Supply	<ul style="list-style-type: none"><li>• 12V DC <math>\pm</math> 5%, Max. 4.7 W, 5.5mm Coaxial Power Plug</li><li>• PoE: 802.3af/at, class 0, Max. 5.5 W</li></ul>
Material	Plastic
Net Weight	0.29 Kg
Gross Weight	0.47 Kg
Protection	IP67 Waterproof, IK10 Vandal Proof
Product Dimensions	115× 115× 86 mm (4.53× 4.53× 3.39 in)
Certifications	CE, NTRA, VCCI, BSMI

Build Features



\*Calculations based on laboratory testing using a 3MP VIGI camera, and an actual performance may vary according to the amount of activity recorded, resolution and other variables. Specifications are subject to change without notice and can be found at [www.tp-link.com](http://www.tp-link.com). ©2024 TP-Link