

# RG-EST100-E

## 2.4 GHz Dual-Stream 500 m Wireless Bridge

DATASHEET

[Explore More](#)



### Highlights


- RG-EST100-E can easily transmit data from 500 m away in real time
- Factory-free configuration, without complex alignment
- IP55 Weatherproof, -30°C~60°C guarantee stable operating at outdoor environment or elevator environment
- Support maximum 10 x 3 MP cameras loading at 100 m, 5 x 3 MP cameras loading at 500 m
- Visually Intuitive statistics monitoring on Ruijie cloud, easy remote maintenance

# Designed for Short Distances PTP

Unique Value for CCTV Scenario

**RG-EST100-E**

Performance Scenarios

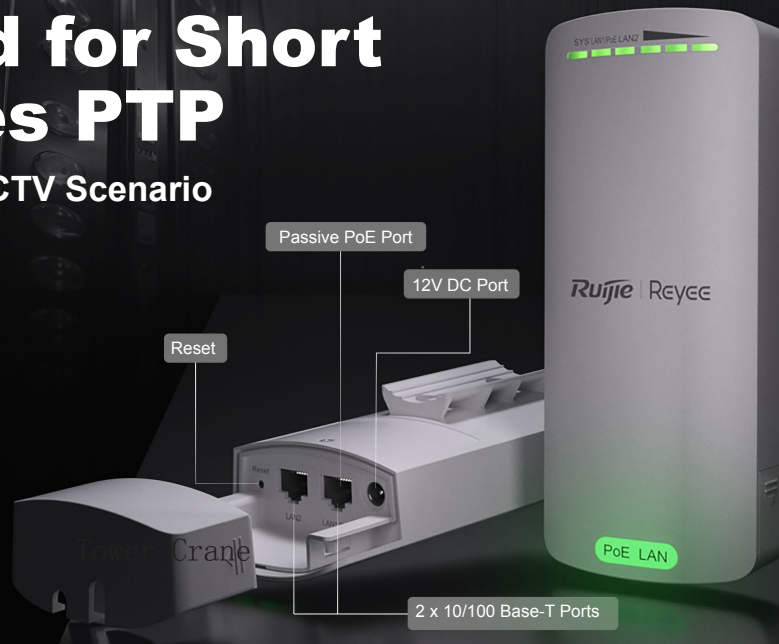

# Designed for Short Distances PTP



Unique Value for CCTV Scenario

**RG-EST100-E**

Performance Scenarios




## Highlight Features

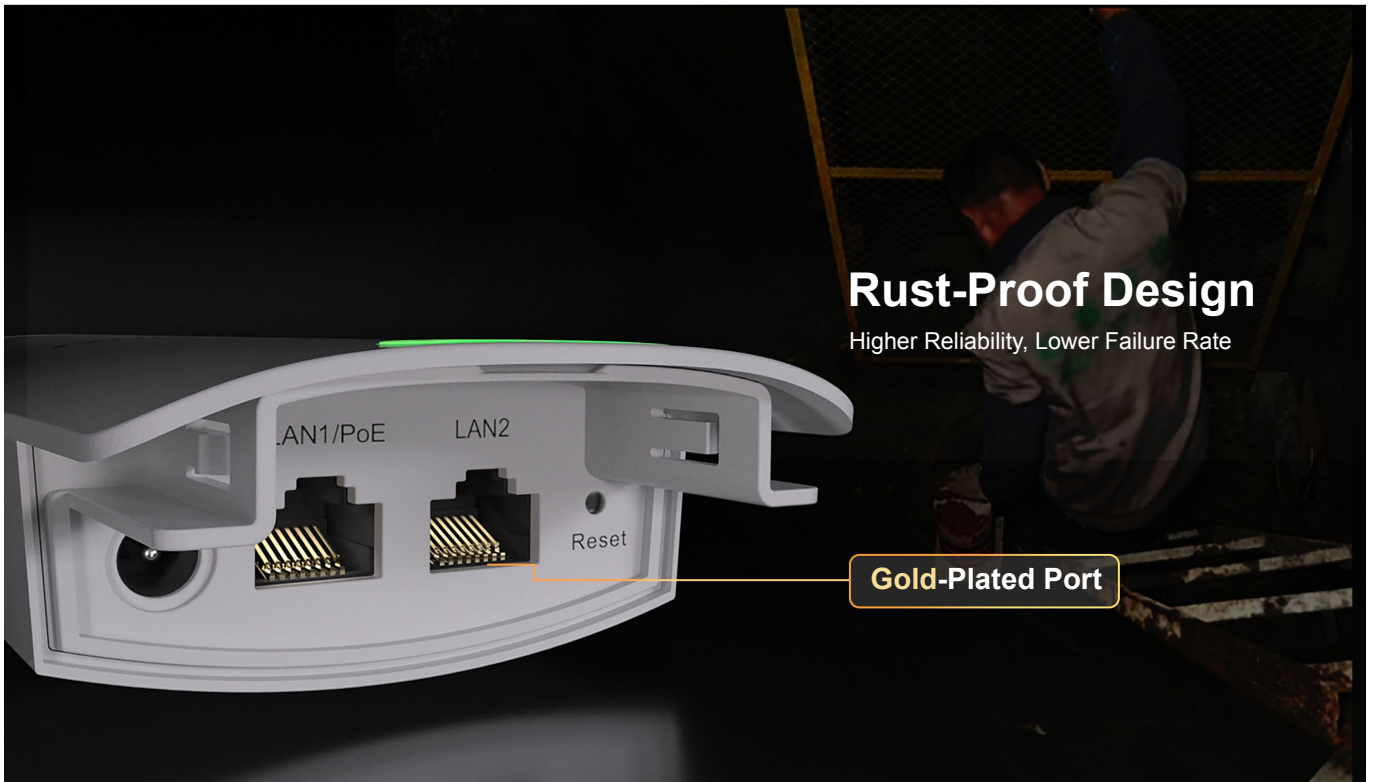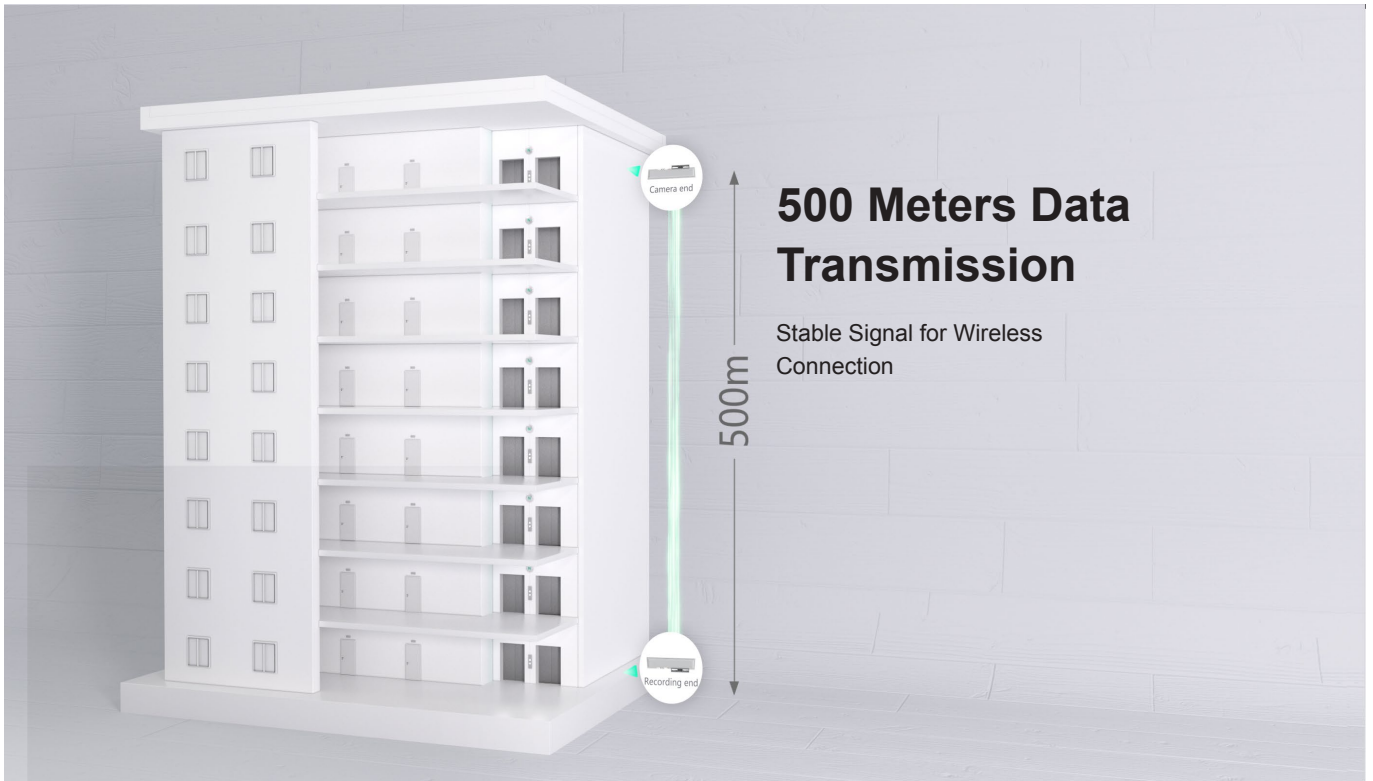

## Highlight Features



**Fluorescent Stickers**  
**Easy Recognition in the Dark**

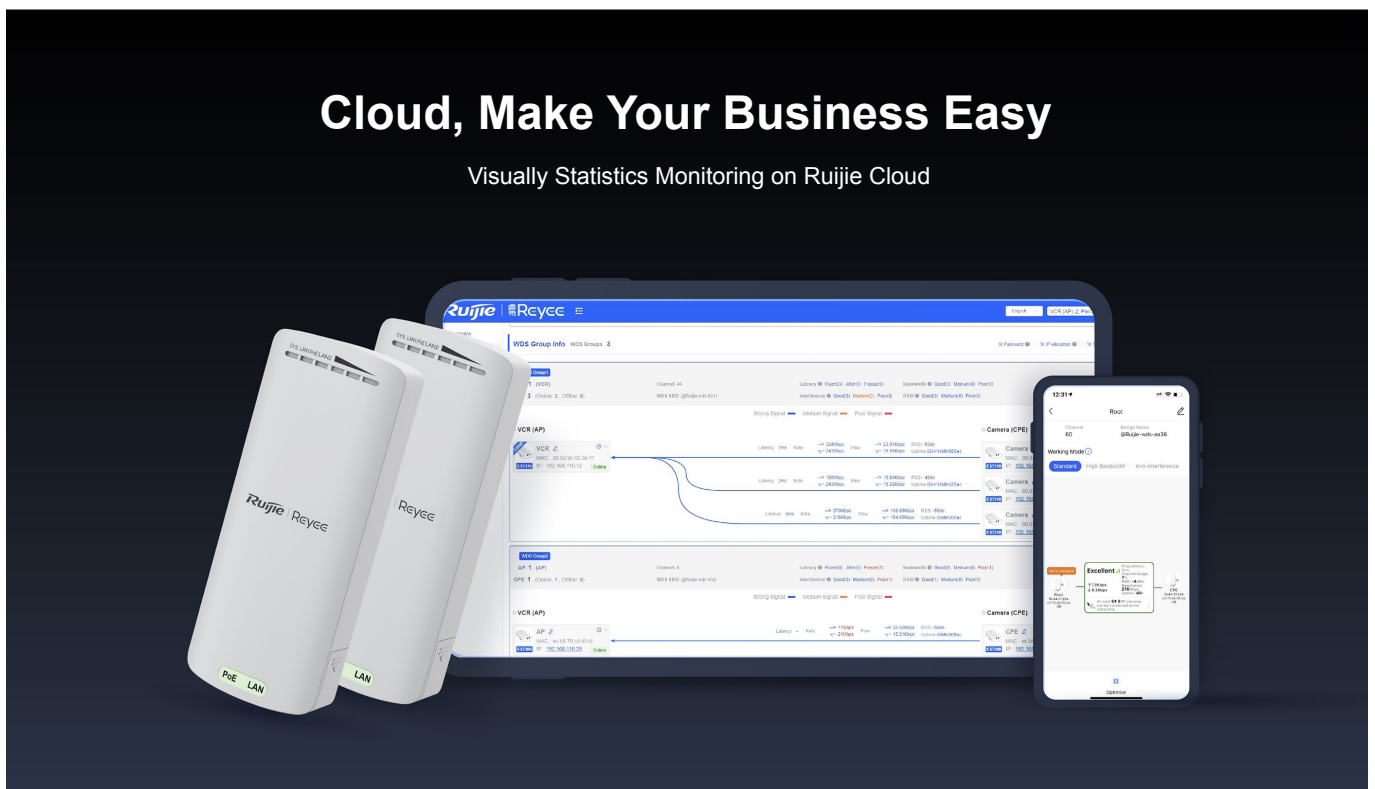

## Cloud, Make Your Business Easy

Visually Statistics Monitoring on Ruijie Cloud



# Specifications

Model	RG-EST100-E
<b>Hardware Features</b>	
Radio Design	2.4 GHz single-band dual-stream
2.4 GHz Band	Yes
5 GHz Band	No
Protocol and Standard	802.11b/g/n
Wi-Fi 4/5/6/7	Wi-Fi 4
Spatial Streams	Two spatial streams, 2x2, MIMO
2.4G Channel Width	Auto/20/40 MHz
5G Channel Width	N/A
Receiver Sensitivity	11b: -91 dBm (1 Mbps), -88 dBm (5 Mbps), -85 dBm (11 Mbps) 11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 11n: -83 dBm@MCS0, -65 dBm@MCS7, -83 dBm@MCS8, -65 dBm@MCS15
Nominal Receive Sensitivity @20 MHz Channel	-91dBm (MCS0) TO -57dBm (MCS9)
Nominal Receive Sensitivity @40 MHz Channel	-83dBm (MCS0) TO -57dBm (MCS9)
Nominal Receive Sensitivity @80 MHz Channel	-76dBm (MCS0) TO -51dBm (MCS9)
Modulation Levels (Adaptive)	MCS0(BPSK)to MCS15 (64QAM)
Wi-Fi Protocols (2.4 GHz)	Wi-Fi 4 (IEEE 802.11b/g/n)
Wi-Fi Protocols (5 GHz)	N/A
Wireless Data Rate	300 Mbps
Wireless Data Rate (2.4 GHz)	300 Mbps
Wireless Data Rate (5 GHz)	N/A

Model	RG-EST100-E
Frequency Bands	802.11b/g/n: 2.4 GHz to 2.483 GHz Note: Country-specific restrictions apply.
2.4 GHz Max. Transmit Power	20 dBm
5 GHz Max. Transmit Power	N/A
Surge Protection	Common mode: $\pm 4$ kV Differential mode: $\pm 2$ kV
Dimensions (W x D x H)	165.5 mm x 68.7 mm x 42 mm (6.51 in. x 2.70 in. x 1.65 in.)
Weight	0.3 kg
Number of Fixed LAN Ports	2
Max. LAN Port Rate	100 Mbps
Number of 10/100BASE-T Ports	2
Number of 10/100/1000BASE-T Ports	N/A
Reset	Yes
Status LED	Yes
Power Supply	12 V passive PoE
Local Power Supply	Yes
PoE Out	No
Supported PoE Standards	No Note: Passive PoE input.
PoE Power Budget	N/A
EMC Compliance	N/A
Safety Compliance	N/A
Operating Altitude	N/A
Antenna Shape	N/A
Antenna Type	Built-in directional antenna, horizontal: 70°, vertical: 70°
Hardware Button	1 x reset button

Model	RG-EST100-E
DC Power Connector Size	Inner Diameter: 2.10 ± 0.05 mm (0.08 ± 0.002 in.) Outer Diameter: 5.50 ± 0.05 mm (0.22 ± 0.002 in.) Depth: 9 mm (0.35 in.)
DC Voltage/Current	12 V/1 A
LEDs	1 x system LED 2 x port LEDs 3 x signal strength LEDs
2.4 GHz Antenna Gain	8 dBi
5 GHz Antenna Gain	No
Power Consumption	<5W
IP Rating	IP55
Color	Standard: Elegant white
Operating Temperature	Operating temperature: -30°C to +60°C (-22°F to +140°F)
Storage Temperature	Storage temperature: -40°C to +70°C (-40°F to +158°F)
Operating Humidity	Operating humidity: 5% to 95% RH (Non-condensing)
Storage Humidity	Storage humidity: 5% to 95% RH (Non-condensing)
MTBF	> 400000 hours
Working Distance	0.5 km
Bridging Performance	60 Mbps/100 meters (HT20) 30 Mbps/500 meters (HT20)
RSSI (dBm)	-58 dBm/100 m -68 dBm/500 m
Throughput & Camera Limits: 3 MP	10/100 m 5/500 m
Throughput & Camera Limits: 4 to 5 MP	6/100 m 3/500 m
Throughput & Camera Limits: 6 to 7 MP	3/100 m 1/500 m
Throughput & Camera Limits: 7 to 8 MP	3/100 m 1/500 m

Model	RG-EST100-E
Management Radio	2.412G~2.472GHz
Number of PtMP Links	1
ESD Protection	Tolerance:±8 kv Contact/ ±15 kv Air
Certification	CE
<b>Software Features</b>	
Operating Mode	Base Station/CPE
Channel Spacing	20 MHz
TDMA	Fixed Mode/Flexible Mode
WLAN Security	WPA2-PSK
Management SSID	@Ruijie-bxxxx
Management SSID for Internet Access	No
SSID Hiding	Yes
Spectrum Scan	Yes
Antenna Aligment	Yes
One-Touch Pairing	No
WMM	Yes
Storm Control	Yes
VLAN Packet Transmit	Yes
DHCP Server	Yes
DHCP Client	Yes
Network DiagNostics	Ping/TraceRoute/Dns
Time & Date	Yes
Firmware Upgrade	Yes
Backup/Restore	Yes
Cloud Management	Yes



Model	RG-EST100-E
Power Configuration	Yes
Country/Region Code	Yes
Remote Restart	Yes
SON(Self-organizing Networking with all Reyeer Devices)	Yes
SNMP	Yes
Link Aggregation	No
Bridge Speed Test	Yes
Max. Number of Devices on a SON	200
Throughput & Camera Limits	Reference performance recommendation table
Ping	Yes
Traceroute	Yes
AI Heatmap	No

## Package Contents

Model	EST100-E
Wireless Bridge/Antenna	2
PoE Injector	0
DC Power Adapter	2
Mounting Bracket	0
Gross Weight	0.3Kg
Package Dimensions (W x D x H)	165.5x 68.7 mm x 42 mm (6.51 in. x 2.70 in. x 1.65 in.)

**Ruijie | Reyce**

 **Redefine your easy network**

---

**Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

**Notice**

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.

**Official Website:** <https://Reyce.Ruijie.com>